

## Permission to copy and make bags from these instructions:

As is true of any words and/or drawings the instant they are captured "in tangible form" (i.e., written down), these instructions are copyrighted. That means they cannot be copied or reproduced without the author's consent. Consent is hereby granted for these instructions to be copied, printed, photocopied, distributed, etc., by individuals and groups who use them in the spirit in which they are offered: as public-service projects, as gifts to individuals in wheelchairs, etc. Permission to use or reproduce these instructions for profit (either by selling the pattern or the finished bags) is NOT granted.

### For a Finished 13x5-inch Tote Bag You'll Need:


- One 14"x14" piece of fabric (something fairly sturdy; colorful is also nice--e.g., home-dec fabrics, bottom-weight cottons and poly/cottons, twills)
- Two yards of twill tape, cording, or ribbon (nothing slippery) for ties

### Construction:

1. Cut tie material into two 1-yard pieces; fold each piece in half lengthwise.

2. Pin or baste folded end of each tie to the right side of fabric, positioned two inches down from top on either side, folds of ties aligned with raw edges of fabric.

Pin or baste folded ends of ties to right side of fabric, 2" from top at either side

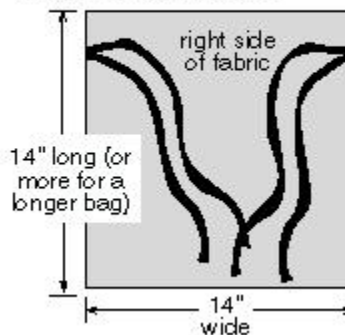

Fold fabric right sides together; stitch side seams; reinforce stitching over ties




3. Fold fabric in half widthwise, right sides together (covering ties).

4. Stitch side seams using a 1/2" seam allowance, catching ties in stitching; reinforce ties by stitching again within the seam allowances.

5. Finish raw edges (serge, zigzag, bind, pink, etc.).

6. Turn top raw edge under 1/2"; turn under again another 1-1/2" (to the point where the ties are attached); pin. Edgestitch along fold to secure hem.

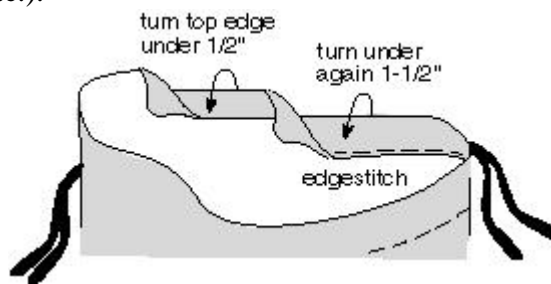


7. Turn right side out and tie bag to arm of wheelchair.

**Optional to add a bit of shape (insert between steps 5 & 6 above):**

- With bag wrong-side-out, flatten one corner to create a triangular point, aligning side seam along center-bottom line.
- Pin; stitch perpendicular to the side seam, roughly 1-1/2 inches from point.
- Repeat for other corner.

Optional to add shape:  
Working from inside of bag, flatten bottom corner, aligning side seam with center bottom

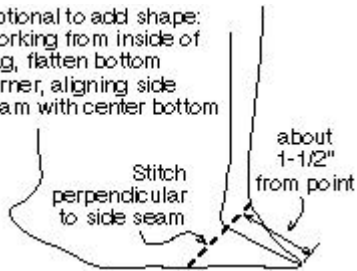

**Variations:**

- Add an inner pocket (or two or three or) for medications, eyeglasses, etc. It can be as simple as cutting rectangles in the appropriate sizes, then hemming, folding, and edgestitching them to the inside of the tote fabric between steps 2 and 3 above.
- Add a lining of coordinating or contrasting fabric. (If adding pockets, stitch them to the lining fabric.)
- Substitute "ties" made from strips of matching fabric that attach to the wheelchair using buttons and buttonholes. If buttonholes aren't your thing but you like the look, consider using heavy-duty snaps and stitching buttons on top to simulate a buttoned closure!